

10/12/00  
09/689035  
JCS21 U.S. PRO  
nts

<b>UTILITY PATENT APPLICATION TRANSMITTAL</b> <small>((Only for new non-provisional applications under 37CFR 1.53 (b))</small>				Attorney Docket No.		47440-021000					
				Total Pages		34					
				First Named Inventor		Tunney, Joseph P.					
				Express Mail Label No.		EL368262590US					
<b>APPLICATION ELEMENTS</b> <small>See MPEP chapter 600 concerning utility patent application contents.</small>				<b>ADDRESS TO:</b> Assistant Commissioner for Patents Box PATENT APPLICATION Washington, DC 20231							
<div style="display: flex; justify-content: space-between;"><div style="width: 48%;"><p>1. <input checked="" type="checkbox"/> Fee Transmittal Form <i>(Submit an original, and a duplicate for fee processing)</i></p><p>2. <input checked="" type="checkbox"/> Specification [Total Pages 21] <i>(preferred arrangement set forth below)</i></p><ul style="list-style-type: none"><li>- Descriptive title of the Invention</li><li>- Cross References to Related Applications</li><li>- Statement Regarding Fed sponsored R &amp; D</li><li>- Reference to Microfiche Appendix</li><li>- Background of the Invention</li><li>- Brief Summary of the Invention</li><li>- Brief Description of the Drawings <i>(if filed)</i></li><li>- Detailed Description</li><li>- Claim(s)</li><li>- Abstract of the Disclosure</li></ul><p><input checked="" type="checkbox"/> Drawing(s) (35 USC 113) [Total Pages 4]</p><p><input checked="" type="checkbox"/> Oath or Declaration [Total Pages 4]</p><div style="margin-left: 20px;"><p>a. <input checked="" type="checkbox"/> Newly executed (original or copy)</p><p>b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63 (d)) <i>(for continuation/divisional with Box 17 completed)</i> [Note Box 5 below]</p><div style="margin-left: 20px;"><p>i. <input type="checkbox"/> <u>DELETION OF INVENTOR(S)</u> Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63 (d) (2) and 1.33 (b).</p></div></div><p><input type="checkbox"/> Incorporation by Reference <i>(useable if Box 4b is checked)</i> The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.</p></div><div style="width: 48%;"><p>6. <input type="checkbox"/> Microfiche Computer Program <i>(Appendix)</i></p><p>7. <input type="checkbox"/> Nucleotide and/or Amino Acid Sequence Submission <i>(if applicable, all necessary)</i></p></div></div>				<b>ACCOMPANYING APPLICATION PARTS</b>							
				<div style="display: flex; justify-content: space-between;"><div style="width: 48%;"><p>8. <input type="checkbox"/> Assignment Papers (cover sheet &amp; document(s))</p><p>9. <input type="checkbox"/> 37 CFR 3.73 (b) Statement <span style="float: right;"><input type="checkbox"/> Power of Attorney</span> <i>(when there is an assignee)</i></p><p>10. <input type="checkbox"/> English Translation Document <i>(if applicable)</i></p><p>11. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <span style="float: right;"><input type="checkbox"/> Copies of IDS Citations</span></p><p>12. <input type="checkbox"/> Preliminary Amendment</p><p>13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) <i>(Should be specifically itemized)</i></p><p>14. <input type="checkbox"/> Small Entity Statement(s) <span style="float: right;"><input type="checkbox"/> Statement filed in prior application, Status still proper and desired</span></p><p>15. <input type="checkbox"/> Certified Copy of Priority Document(s) <i>(if foreign priority is claimed)</i></p><p>16. <input checked="" type="checkbox"/> Other <u>Patent Cover Sheet and Certificate of Express Mailing</u></p></div><div style="width: 48%;"></div></div>							
<p>17. If a <b>CONTINUING APPLICATION</b>, check appropriate box and supply the requisite information:</p> <div style="display: flex; justify-content: space-between;"><div><input type="checkbox"/> Continuation</div><div><input type="checkbox"/> Divisional</div><div><input type="checkbox"/> Continuation-in-part (CIP) of prior application No:</div></div>											
<b>18. CORRESPONDENCE ADDRESS</b>											
<input type="checkbox"/> Customer number or bar code label				<div style="border: 1px solid black; padding: 5px; text-align: center;">(Insert Customer No. or Attach bar code label here)</div>				or <input checked="" type="checkbox"/> Correspondence address below			
<b>NAME</b>				Margaret M. Duncan							
				McDermott, Will & Emery							
<b>ADDRESS</b>				227 West Monroe Street							
				31st Floor							
<b>CITY</b>		Chicago		<b>STATE</b>		IL		<b>ZIP CODE</b>		60606	
<b>COUNTRY</b>		US		<b>TELEPHONE</b>		(312) 372-2000		<b>FAX</b>		(312) 984-7700	
<b>CERTIFICATE OF MAILING</b>											
I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail in an envelope addressed to: Box PATENT APPLICATION / Assistant Commissioner for Patents / Washington, D.C. 20231 on this date: <u>October 12, 2000</u> (Express Mail Label No. Above)											
Typed or printed name				Catherine N. Hunter							
Signature						Date		October 12, 2000			

# FEE TRANSMITTAL

Note: Effective November 10, 1998  
Patent fees are subject to annual revision

TOTAL AMOUNT OF PAYMENT \$710.00

Complete if Known

Application Number unassigned  
Filing Date October 12, 2000  
First Named Inventor Joseph P. Tunney  
Title A Method of Cleaning Pressurized Containers  
Group Art Unit unassigned  
Examiner Name unassigned  
Attorney Docket Number 47440-021000

10/12/00  
09/689035  
10/12/00

## METHOD OF PAYMENT (check one)

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:

Deposit Account 13-0206

Deposit Account Name McDermott, Will & Emery

- ☒ Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17 ☐ Charge the Issue Fee Set in 37 CFR 1.18 at the Mailing of the Notice of Allowance

2. ☐ Payment Enclosed:

☐ Check ☐ Money ☐ Other Order

## FEE CALCULATION

### 1. FILING FEE

Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)	Fee Description	Fee Paid
101	710	201	355	Utility filing fee	710
106	320	206	160	Design filing fee	
107	490	207	245	Plant filing fee	
108	710	208	355	Reissue filing fee	
114	150	214	75	Provisional filing fee	
SUBTOTAL					710

### 2. CLAIMS

	Highest No. Paid For	Extra	Fee from below	Fee Paid
Total Claims	20	-20 = 0	18	0
Independent Claims	1	-3 = 0	80	0
Multiple Dependent Claims				

Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)	Fee Description
103	18	203	9	Claims in excess of 20
102	80	202	40	Independent claims in excess of 3
104	270	204	135	Multiple dependent claims
109	80	209	40	Reissue independent claims over original patent
110	18	210	9	Reissue claims in excess of 20 and over original patent

SUBTOTAL 0

## FEE CALCULATION (continued)

### 3. ADDITIONAL FEES

Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)	Fee Description	Fee paid
105	130	205	65	Surcharge - late filing fee or oath	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet	
139	130	139	130	Non-English specification	
147	2,520	147	2,520	For filing a request for reexamination	
112	920*	112	920*	Requesting publication of SIR prior to Examiner action	
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	
115	110	215	55	Extension for reply within first month	
116	390	216	195	Extension for reply within second month	
117	890	217	445	Extension for reply within third month	
118	1,390	218	695	Extension for reply within fourth month	
128	1,890	228	945	Extension for reply within fifth month	
119	300	219	155	Notice of Appeal	
120	300	220	155	Filing a brief in support of an appeal	
121	260	221	135	Request for oral hearing	
138	1,510	138	1,510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive - unavoidable	
141	1,210	241	605	Petition to revive - unintentional	
142	1,240	242	620	Utility issue fee (or reissue)	
143	440	243	220	Design Issue fee	
144	600	244	300	Plant Issue fee	
122	130	122	130	Petitions to the Commissioner	
123	50	123	50	Petitions related to provisional applications	
126	240	126	240	Submission of Information Disclosure Stmt	
581	40	581	40	Recording each patent assignment per property (times number of properties)	
146	760	246	380	Filing a submission after final rejection (37 CFR 1.129(a))	
149	760	249	380	For each additional invention to be examined (37 CFR 1.129(b))	
Other fee (specify)					
Other fee (specify)					
Reduced by Basic Filing Fee Paid					
SUBTOTAL (3)					

## SUBMITTED BY

Typed or Printed Name Margaret M. Duncan

Signature

Margaret M. Duncan

Date

October 12, 2000

Complete (if applicable)

Reg. Number

30,879

Deposit Account

13-0206

Patent Case No. 47440-021000

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

**APPLICATION FOR UNITED STATES LETTERS PATENT**

**INVENTOR(S):** Joseph P. Tunney  
1207A Central Street  
Evanston, Illinois 60201  
United States

and

Paul Buchan  
14 Kowalchuk Crescent  
Regina Saskatchewan  
Canada S4R 6W8

**TITLE:** **A METHOD OF CLEANING PRESSURIZED  
CONTAINERS CONTAINING ANHYDROUS  
AMMONIA**

**ATTORNEY(S):** Joseph H. Paquin, Jr.  
Margaret M. Duncan  
John G. Bisbikis  
Tracey R. Thomas  
Matthew E. Leno  
Stephen T. Scherrer  
Joy Ann G. Serauskas (Patent Agent)  
MCDERMOTT, WILL & EMERY  
227 West Monroe Street  
Chicago, IL 60606-5096  
tel. no. (312) 372-2000  
fax no. (312) 984-7700

## A METHOD OF CLEANING PRESSURIZED CONTAINERS CONTAINING ANHYDROUS AMMONIA

5

### Field of Invention

The present invention relates to a method of cleaning pressurized containers having chemicals contained therein. Specifically, the present invention relates to a method of cleaning pressurized containers such as, for example, rail tank cars, mobile tanks or the like. Further, the chemicals may be any material stored under pressure that may be difficult to collect and dispose of due to the hazardous characteristics thereof. Preferably, however, the chemicals contained within the container comprise anhydrous ammonia.

### Background of the Invention

It is, of course, generally known to store and/or transport chemicals having hazardous characteristics via pressurized containers. Further, it is also generally known to clean these containers using a variety of methods and systems. In the past, cleaning pressurized containers entailed venting excess gaseous material to the atmosphere. Further, unpressurized containers contained bottom hatches or valves for draining liquid chemicals. However, many hazardous chemicals escaped into the environment thereby causing health risks for humans, vegetation and wildlife. With the advent of environmental standards and compliance, however, venting or draining hazardous chemicals to the environment has generally become illegal. Today, the chemicals are typically routed to a flare to be incinerated or otherwise collected for disposal.

However, while some of the gases contained within the containers may be relatively easy to recover and dispose of by venting of the pressurized containers to a flare, it is difficult to remove all of the gases contained therein. Further, liquid product may remain inside a container after cleaning. Typical systems and methods of cleaning may involve injecting the container with a quantity of steam that may aid in bringing the liquid chemicals to the gaseous phase and removing the steam/gaseous chemical product combination for incineration or disposal. However, problems may occur using steam to

remove chemicals from pressurized containers since steam may condense within the container forming liquid water or ice. The liquid water or ice may mask the presence of the chemicals from detectors. Further, the liquid water or ice may interfere with the removal of the chemicals from the container.

5 Another method of removal, especially for unpressurized containers having liquid therein, may include entering the container to manually remove the chemical. While this may be a relatively efficient and thorough way to remove the chemical from the container, it may be very dangerous, as it requires an individual to actually enter the container thereby exposing the individual to the chemicals contained therein. Further, by opening  
10 the container, there may be a significant risk that some of the chemicals may escape into the environment.

Therefore, an improved system of cleaning pressurized containers is necessary. Particularly, a system is needed that overcomes the problems associated with typical cleaning systems. Further, a system is needed that cleanly and efficiently moves chemical  
15 product from a pressurized container and transports the waste product to a proper disposal system such as a flare for incineration.

### **Summary of the Invention**

The present invention relates to a method of cleaning a pressurized container having anhydrous ammonia ("AA") therein. More specifically, the present invention  
20 allows containers such as, for example, rail tank cars, to be cleaned safely and efficiently without risking exposure of the AA to people or the environment. The invention entails injecting heated and pressurized nitrogen gas into the container thereby purging the container of any chemical therein to form a nitrogen/AA mixture. The nitrogen/AA mixture may then be sent to a flare for incineration. Further, the heated nitrogen gas may  
25 aid in pulling the AA out of the container and transporting the chemical to the flare for incineration.

To this end, in an embodiment of the present invention, a method of cleaning a pressurized container is provided. The method comprises the steps of providing a pressurized container containing an amount of anhydrous ammonia wherein the container  
30 has inlet and outlet valves and injecting a quantity of heated nitrogen gas into the container

to form a nitrogen/anhydrous ammonia mixture. The method further comprises venting the nitrogen/anhydrous ammonia mixture to the flare and repeating the injection of the container with heated nitrogen gas and venting the mixture to a flare until the concentration of anhydrous ammonia is less than or equal to about 10,000 ppm.

5 In an embodiment of the present invention, the method comprises the steps of providing a natural gas inlet for feeding natural gas to a burn ring within the flare and feeding the nitrogen/anhydrous ammonia mixture to the burn ring.

10 In an embodiment of the present invention, the method comprises the steps of providing a blower for flowing air into the flare and blowing air into the flare via the blower to aid in the burning of the anhydrous ammonia.

15 In an embodiment of the present invention, the method comprises the steps of visually looking for leaks in the container and providing a housing having a cover on the container having a plurality of valves therein and a plurality of sideports for access to the interior of the housing. The method further comprises sampling the interior of the housing via the sideport for a quantity of anhydrous ammonia via a chemical detecting instrument for leaks and removing the cover of the housing to inspect the interior of the housing for leaks.

20 In an embodiment of the present invention, the method comprises the steps of weighing the container and comparing the weight of the container to a tare weight of the container to determine a weight of the anhydrous ammonia therein.

25 In an embodiment of the present invention, the method comprises the steps of providing a nitrogen tank having nitrogen contained therein and attaching a nitrogen line between the nitrogen tank and a first valve of the container. The method further comprises the steps of heating a portion of the nitrogen line to heat nitrogen contained within the nitrogen line and attaching a flare line between the container and the flare.

In an embodiment of the present invention, the method comprises the steps of sampling a quantity of anhydrous ammonia in vapor form to determine a concentration of vapor within the container and verifying the identity of the anhydrous ammonia within the container.

In an embodiment of the present invention, the nitrogen gas is heated to between 100°F and 300°F.

In an embodiment of the present invention, the method comprises the steps of inspecting the container for leaks via a leak detection apparatus and stopping the cleaning  
5 of the container if a leak is found having a concentration of at least 50 ppm.

In an embodiment of the present invention, the method comprises the steps of injecting the heated nitrogen into the container via a liquid valve on the container and venting the gas within the container to the flare via one of the valves.

In an alternate embodiment of the present invention, a method of cleaning a  
10 pressurized container is provided. The method comprises the steps of providing a pressurized container an amount of anhydrous ammonia wherein the container has a plurality of valves and injecting a quantity of heated nitrogen gas into the container to form a nitrogen/anhydrous ammonia mixture. The method further comprises venting the nitrogen/anhydrous ammonia mixture to a flare and repeating the injection of the container  
15 with the heated nitrogen gas and venting the mixture of the flare until the concentration of the anhydrous ammonia is at most about 50 ppm.

In an embodiment of the present invention, the method comprises the steps of inspecting the container for leaks.

In an embodiment of the present invention, the method comprises the steps of  
20 inspecting the container for leaks via a leak detection apparatus and stopping the cleaning of the container if a leak is found having a concentration of at least about 50 ppm.

In an embodiment of the present invention, the method comprises the steps of visually looking for leaks in the container and providing a housing having a cover and an interior space wherein a plurality of valves are contained within the interior space. The  
25 method further comprises providing at least one sideport in the housing for accessing the interior space of the housing, sampling the interior of the housing via the sideport for a leak in the plurality of valves via a chemical detection device and removing the cover to inspect the interior space of the housing for leaks.

In an embodiment of the present invention, the method comprises the steps of weighing the container and comparing the weight of the container to a tare weight of the container to determine a weight of the anhydrous ammonia therein.

5 In an embodiment of the present invention, the method comprises the steps of providing a nitrogen tank having nitrogen therein and attaching a nitrogen line between a nitrogen tank and a first valve of the container. The method further comprises heating a portion of the nitrogen line to heat nitrogen contained within the nitrogen line and attaching a flare line between the container and a flare.

10 In an embodiment of the present invention, the method comprises the step of sampling a quantity of anhydrous ammonia contained in the headspace of the container to determine a concentration of the anhydrous ammonia within the headspace.

In an embodiment of the present invention, the nitrogen gas is heated to between 100°F and 300°F.

15 In an embodiment of the present invention, the method comprises the steps of injecting the heated nitrogen into the container via a liquid valve on the container and venting the nitrogen/anhydrous ammonia mixture within the container to the flare via a vapor valve on the container.

20 In an embodiment of the present invention, the method comprises the steps of injecting the container with steam after the concentration of the anhydrous ammonia therein is about 50 ppm, removing the pressure plate on the container and entering the container and cleaning debris from the container.

25 It is, therefore, an advantage of the present invention to provide a method of cleaning a pressurized container having a quantity of chemicals, such as, for example, AA, therein that safely and efficiently removes the chemicals from the container. Moreover, it is advantageous that the present invention removes the chemicals from the container without risking exposure to people or the environment.

30 Further, it is an advantage of the present invention to provide a method of cleaning a pressurized container having a quantity of chemicals therein that allows the chemicals to be removed without causing damage to the container by freezing the container or pipes connected thereto. In addition, an advantage of the present invention is that the heated



nitrogen gas used to remove the product will not condense within the container and therefore will not mask the presence of the chemicals therein.<sup>1</sup>

Another advantage of the present invention is to provide a method of cleaning a pressurized container having a quantity of chemicals therein that is largely automatic and therefore allows an individual to monitor the process without exposing the individual to the chemicals. Additionally, an advantage of the present invention is that a plurality of types of containers may be cleaned using the system and method defined herein, including, but not limited to, rail tank cars and other like containers.

Additional features and advantages of the present invention are described in and will be apparent from, the detailed description of the presently preferred embodiments and from the drawings.

#### **Brief Description of the Drawings**

**Figure 1** illustrates an inspection process in an embodiment of the present invention for pressurized containers to be used prior to the cleaning of the containers by the heated nitrogen.

**Figure 2** illustrates a heated nitrogen gas cleaning process for the pressurized containers.

**Figure 3** illustrates a steam cleaning process for the pressurized containers to be conducted after the heated nitrogen process.

**Figure 4A** illustrates a cleaning system for pressurized containers, such as, for example, for rail tank cars in an embodiment of the present invention. Further, **Figure 4B** illustrates a protective housing, headspace, valves and sideports situated atop a container.

#### **Detailed Description of the Presently Preferred Embodiments**

The present invention relates to a method of cleaning pressurized containers such as, for example, rail tank cars and the like. More specifically, the present invention provides a method of cleaning pressurized containers that includes but is not limited to, injecting heated, pressurized nitrogen gas into a container having a quantity of chemicals therein. Specifically, the present invention relates to cleaning pressurized containers having a quantity of AA therein. The nitrogen gas purges the container of the AA contained therein. The AA may then be transported to a flare for incineration or may

otherwise be collected for disposal. The flare may be configured and optimized to fully incinerate the AA safely and efficiently.

Referring now to the drawings, wherein like numerals refer to like features, Figures 1 to 3 show three embodiments of a cleaning method according to the present invention. Further, Figures 4A and 4B illustrate a cleaning system for a container, such as for a rail tank car, whereby the container may be cleaned. Although this system for cleaning containers may be utilized with any pressurized container apparent to those skilled in the art, mobile or immobile, the system herein described relates specifically to rail tank cars or other mobile container situated atop a plurality of rails.

A rail tank car may include, but may not be limited to, a pressurized container 402 on a plurality of rail wheels 401 (also called a truck) allowing the container 402 to be transported on a track 403 from one location to another. It should be noted that rail tank cars may include any mobile container apparent to one skilled in the art. Typical rail tank car containers may have a protective housing 406 atop the container 402. The protective housing 406 have a plurality of valves 408, 410 (as shown in Figure 4B) contained therein for attaching pipes or lines thereto. Valve 408 may be a vapor-type valve that may typically be utilized to remove vapors from the container 402. The valves 410 may be liquid-type valves that may allow a liquid chemical to be added or removed from the container. Typically, the liquid valves 410 may be connected to pipes that may go to the bottom of the container 402. Alternatively, the vapor valve 408 maybe connected to a pipe that merely goes to space near the top of the container 402. Although many rail tank cars may have only three valves within the protective housing 406, this invention should not be limited in that regard. Any number and type of valves may be contained within the protective housing 406. Moreover, the valves need not be located only within the protective housing. Valves may be located in any location on the container 402 to remove or add materials to the container 402.

A pressure plate (not shown) may be included within the protective housing 406 that may be openable to allow an individual to gain access to an interior of the container 402. The pressure plate may be disposed on the bottom of the protective housing 406 and may be fixed to the container 402 via bolts (not shown). When an individual wishes to

gain access to the interior of the container 402, the pressure plate may be removed by removing the bolts. To remove the pressure plate, the protective housing 406 and valves 408,410 should be removed from the container 402. However, the pressure plate may be disposed anywhere on the container 402 as may be apparent to those skilled in the art.

5 The protective housing 406 may be opened via a lid 412 to gain access to the valves 408,410 and headspace 413 that may be contained therein. Further, the protective housing 406 may have at least three sideports 404 for gaining access to the valves 408,410 within the protective housing 406 without opening the protective housing 406 by the lid 412.

10 The container 402 may contain any chemical or chemicals that may be apparent to those skilled in the art. Further, the chemicals may be of a hazardous nature that may pose a risk to individuals exposed to the chemical. Specifically, the chemical or chemicals may typically be in gaseous form when under standard temperature and pressure. However, the chemical or chemicals may be a liquid when stored under pressure within  
15 the container 402. Typical chemicals that may be stored within the container may include, but may not be limited to, liquefied petroleum gas ("LPG") and/or anhydrous ammonia ("AA"). Preferably, however, the container contains AA. LPG may include, but may not be limited to, the following chemicals: butane, isobutane, propane, propylene, butylenes and other chemicals apparent to those skilled in the art. HAWLEY'S CONDENSED  
20 CHEMICAL DICTIONARY 703 (12th ed. 1993). Moreover, LPG may include mixtures of these materials. LPG is typically extremely flammable when in gaseous form. Moreover, other chemicals that may be stored within the containers that may be cleaned using the system and methods described herein may be butadiene, butene, butyne, cyclobutane, cyclopropane, dimethyl propane, ethane, ethylene oxide, propyne, ethylene, methyl  
25 butene, methyl ether, methyl propene, 1,3-pentadiene and other chemicals apparent to those skilled in the art.

Referring now to Figure 1, an inspection process 1 is shown that may be instituted prior to cleaning the container 402 via the cleaning process described herein with reference to Figures 2 and 3. The container 402 may be carefully preliminarily inspected  
30 via a "search container" step 10. Specifically, an inspector may move around the

container 402 looking for evidence of leakage of the chemicals via step 12. Leaks may be apparent by wet spots, corrosion in a particular area, hissing or the like. Of course, the inspector should wear applicable safety clothing and equipment and approach the container from upwind to protect the inspector from the deleterious effects of any leaking chemical.

5 Further, the inspector may use a catwalk 405 or other structure to allow the inspector to inspect all areas of the container 402 including the top of the container 402. Likewise, the inspector may use a ladder 407 to get relatively close to the protective housing 406 and the valves 408, 410 contained therein. This preliminary inspection may be done by visually searching for leaks around the container 402 and any valves or pipes protruding therefrom.

10 If the inspector sees evidence of leakage, then the process 1 may be halted while the inspector or other individual assesses the leak via step 14. The container 402 may be submitted to a repair facility to repair the leak prior to continuing the process 1.

If, however, the inspector sees or otherwise has detected no indication or evidence of leakage from the container 402 via the "search container" step 10, the inspector may  
15 sample one or more of the sideports 404 via step 16 using a leak detection device. The sideport 404 may allow an individual to gain access to the valves within the protective housing 406 without opening the protective housing 406 and exposing the individual to a large amount of the chemicals that may be contained within the headspace 413.

For example, an apparatus may remove a sample of gas from one of the sideports  
20 404 via step 16 to determine if there is a leak in a valve or seal within the protective housing 406. The apparatus may include any device capable of determining a chemical composition of a volume of air, such as, for example, a Draeger® detector or a multi-gas tester manufactured by Industrial Scientific Corporation ("ISC"). A Draeger® detector may measure the chemical composition in ppm. The multi-gas tester may detect an  
25 oxygen "lower explosion limit" ("LEL") of a volume of gas. The multi-gas tester may test for the LEL by creating a combustion of the gas in the sample and sensing the heat produced. The heat produced is directly related to the percent LEL of the sample.

If there is evidence of a leak at the sideport 404, an assessment may be made via  
30 step 14 concerning whether the container 402 may be cleaned or whether the container 402 should be submitted for repairs. However, if there is no evidence of leaks from the

sideport 404, then the seal of the inspector's face mask may be broken so that the inspector may test for odors via step 20 at the sideport 404. If there is evidence of a leak then the leak may be assessed via step 14. For safety purposes, however, the inspector may not break the seal of his or her facemask to test for odors.

5 If there is no evidence of a leak or leaks during step 20, then the inspector's facemask may be completely removed and the protective housing lid 412, as shown in Figure 4B, may be opened. The headspace 413 and the valves 408,410 may be inspected visually via step 24. The inspector may note the valve types and damage to the valves, pipes, and/or fittings contained within the protective housing 406. If there is substantial  
10 damage to any valve, pipe or fitting or to the container 402 itself, the damage may be assessed via step 14 and a decision may be made as to whether the cleaning process should be continued. If the container 402 passes the inspection, then a cleaning process 100 may begin, as shown in Figure 2.

Referring now to Figure 2, a cleaning process 100 is illustrated. The cleaning  
15 process 100 may be utilized to clean the container 402 having an amount of a chemical therein. Specifically, the cleaning process 100 may be used to clean containers having LPG or AA, however any chemical or mixture of chemicals may be contained within the container as may be apparent to those skilled in the art.

The container 402 may have a tare weight printed in an accessible location, such  
20 as, for example, on a side of the container for easy visual access. The container 402, having been inspected for leaks pursuant to the inspection process 1 as shown in Figure 1, may be weighed via a "weigh container" step 102 and compared against the tare weight of the container 402 to determine a weight of the chemical contained therein. The amount of  
25 chemical is important to make projections concerning how the container 402 may be cleaned and how long the cleaning process may take to get the chemical out of the container 402. Alternatively, the "weigh container" step 102 may be skipped.

After the container 402 is weighed, it may be grounded via step 104 to minimize  
the possibility of a spark being generated that may ignite the hazardous chemical contained therein. Specifically, a ground wire may be connected to a ground lug on the container  
30 402 or in any other locations apparent to a person having ordinary skill in the art.

After the container 402 is grounded, a pipe and a pressure gauge (not shown) may be attached to the vapor valve 408 via step 106. The vapor valve 408 may then be opened slowly to pressurize the gauge allowing an individual to note and record the pressure contained within the container 402. It should be noted that the valves 408,410 on the container 402 and pipes attached to the container 402 may be any size and/or shape that may be apparent to those skilled in the art. The pressure gauge may indicate whether there is residual pressure of the chemicals within the container 402. If there is residual pressure within the container 402, then a sample may be removed from the container 402 via step 112. However, if there is no residual pressure within the container 402, then the container may be filled with nitrogen gas through one of the liquid valves 410 and the container 402 may be filled to a known pressure via step 110 so that a sample of the nitrogen/chemical mixture may be taken from the container 402 via step 112. The pressure after addition of the nitrogen gas via step 110 may be above about 0 psi and below about 12 psi after nitrogen is added thereto. However, about 6 psi is preferable for removing a sample therefrom.

The nitrogen that may be used to fill the container 402 in step 110 or that may be added to clean the container 402 may be heated before entering the container 402. Heating the nitrogen serves the purpose of providing a large volume of nitrogen gas to aid in cleaning the container 402. Further, heating the nitrogen ensures that no liquid nitrogen enters into the container 402 to damage parts of the container 402. For example, liquid nitrogen may freeze important parts such as valves and pipes and further may cause the walls of the container to freeze and crack. As shown in Figure 4A, the nitrogen may be stored in a tank 414 and allowed to flow through a nitrogen vaporizer 416. Generally, the nitrogen vaporizer uses ambient temperatures to convert the liquid nitrogen into the gas phase. However, ambient temperatures may be relatively low depending upon where the system is located. Therefore, the nitrogen may then be vaporized by the addition of heat. The nitrogen may flow to a steamer 418 via a pipe 420 where the pipe 420 may be heated by steam to a desired temperature. The steam itself may be heated by boilers 419. Typically, the nitrogen gas may be between 100°F and 300°F but may preferably be 200°F. The nitrogen, however, should be at least 100°F or above to ensure that no liquid

nitrogen flows into the container 402. The temperature of the nitrogen gas may be verified using a thermometer prior to entering the container 402. The heated nitrogen gas may then be added to the container 402 via an input line 426.

After the heated nitrogen gas is added to the container 402 to a pressure of about 6  
5 psi via step 110 or if there already is residual pressure within the container 402, a sample of the chemical may be removed from the container 402. The pressure within the container 402, either residual or added via step 110, may allow the sample to be withdrawn from the container 402. The sample may be withdrawn from any valve or pipe.

10 The container 402 may again be inspected for leaks via step 114. If a leak is detected around the protective housing area and the reading is about 10% or more of the LEL for liquefied petroleum gas or over about 50 ppm for anhydrous ammonia, then the leak must be assessed to determine whether the container should be removed from the cleaning process. If no leak is detected, then the vapor valve 408 may be closed and the  
15 pressure gauge may be removed.

The sample taken from the container 402 may be sampled, tested and verified via step 116. Specifically, a "commodity sampling device" ("CSD") may preferably be connected to the pipe leading from the vapor valve 408. However, the sample may be taken as noted with respect to step 112, from any pipe or valve having direct access to the  
20 interior of the container 402. The vapor valve 408 may then be opened to allow vapors within the container 402 to flow to the CSD. An amount of vapor, preferably enough to fill the sampling device to half full, may then be removed from the container 402. The CSD may be a Draeger® apparatus or any other sampling device and may be utilized to verify the identity of the contents of the container 402. This verification may ensure that  
25 the chemical or chemicals contained therein are properly identified and, therefore, handled safely and properly during the cleaning of the container 402. If the pressure of the chemical is over a predefined level, such as preferably 100 psi, or if the weight of the chemical within the container is above a predefined level, such as preferably 2000 pounds, then the container 402 may be removed from the cleaning process.

After the chemical material's identity has been verified via step 116, the vapor valve 408 may be attached to a flare line 422. For example, the flare line 422 may be attached to a hammerlock fitting that is on a 2" attached to the vapor valve 408. However, the flare line 422 may be attached to the vapor valve 408 in any way apparent to one having ordinary skill in the art. The flare line 422 may run from the container 402 to a flare 424, as shown in Figure 4A. The flare 424 may ignite to form a flame using ignited natural gas 433 as a pilot. Highly combustible chemicals, such as LPG, may be fed directly into the flare 424 and incinerated using the flame of the pilot to ignite the chemicals. However, a flare ring may be ignited using the natural gas 433 to fully combust less combustible materials, such as AA. As shown in Figure 4A, the flare line 422 may allow the chemical to be fed into the flare 424 causing the hazardous chemical to be incinerated as it passes through the flare. Further, outside air 431 may be fed into the flare 424 using a blower with a motor 432 to aid in the burning of the hazardous chemical within the flare 424. Typically, the blower with the motor 432 may be utilized to aid in the burning of less combustible materials, such as, for example, AA or higher combustible materials at low concentrations. To ensure complete burning of the chemicals within the flare 424 the blower with the motor 432 and the flare ring may be used together. Further, the blower may be used with highly combustible materials such as LPG for smokeless operation of the flare 424. The flare 424 may be engineered to burn a plurality of different chemicals, such as, preferably, liquefied petroleum gas and anhydrous ammonia. For example, a flare engineered and provided by Tornado Technologies Inc. may be used in this invention for the burning of chemicals such as LPG and AA.

The vapor valve 408 may then be opened to allow the gas contained therein to vent to the flare 424 thereby incinerating the residual gas contained within the container 402 via step 118. During this process, the container may again be inspected for leaks. If the chemical detection meter shows a level of the chemical at a given level, such as preferably about 75% of the LEL for liquefied petroleum gas or about 50 ppm for anhydrous ammonia, then the leak should be assessed. Based on the severity of the leak, the container may be taken from the cleaning process for repairs. As the pressure is relieved and the gas is released, the chemical therein may be vented to the flare 424. When the



pressure within the container 402 reaches a predetermined level, such as between about 0 psi and about 6 psi and preferably about 3 psi, then the vapor valve 408 may be closed. An indicator light (not shown) may show when the pressure within the container 402 reaches the predetermined level.

5           At this point, the heated nitrogen line 426 may be attached to one of the liquid valves 410 while the flare line 422 remains connected with the vapor valve 408. A pressure gauge may be attached to the other liquid valve 410. The heated nitrogen may then be added to the container 402 via step 120 to raise the pressure within the container 402 to a desired value. The desired value may be between about 10 psi and about 30 psi  
10           and preferably about 18 psi although any pressure is contemplated that may be apparent to those skilled in the art. The vapor valve 408 may then be opened releasing the gas to the flare 424 via step 122 thereby incinerating the chemicals that may be contained therein. When the pressure reaches a desired value between about 0 psi and about 6 psi, preferably about 3 psi, the vapor valve may be closed.

15           The addition of heated nitrogen to the container 402 via step 120 and the subsequent venting to the flare 424 via step 122 may be repeated as desired so that the concentration of the chemical within the container 402 may reach a desired level. If the container 402 is not to be steam cleaned and is to be used to store and/or carry the same type of chemical that it had previously stored and/or carried and the concentration of the  
20           chemical therein has reached the desired level, then the residual pressure within the container 402 may be vented to the flare 424 via step 124 and the container 402 may be detached from all pipes and/or lines. It should be noted if the container 402 is not to be steam cleaned, a preferable concentration level of chemical within the container may be about 50% of the LEL for the liquefied petroleum gas or about 10,000 ppm for anhydrous  
25           ammonia. Typically, it may take a plurality of cycles of nitrogen gas to clean the container 402 to the desired level. For example, it may take six or more cycles to reach the desired level. However, any number of cycles may be performed as may be apparent to those skilled in the art. The container 402 may then be removed from the cleaning area and may be repaired or transported away.

However, if the container 402 is to transport and/or store a different chemical than previously contained therein then the container 402 should be steam cleaned via the steam cleaning process 200 shown in Figure 3. Further, if the pressure plate (not shown) on the container 402 is to be removed (for example, to thoroughly clean therein with steam, as shown in Figure 3), then the container 402 may be cleaned using heated nitrogen gas twice before the pressure plate is removed and the container 402 is steam cleaned.

Prior to steam cleaning via a process 200 shown in Figure 3, the container 402 may first be prepared for the steam cleaning. For example, a rail tank car may have a magnetic gauging device rod that may be removed or it may get damaged during the steam cleaning. In addition, other devices may be removed from the container 402 in preparation for the steam cleaning process 200.

After the container 402 is prepared for the steam cleaning, a steam line (not shown) may be attached to the liquid valve 410 via step 202 for adding steam to the container 402. The liquid valve 410 may then be opened to pressurize the container 402 with steam to a desired pressure via step 204. An adequate range of pressure may be between about 10 and about 20 psi, preferably about 15 psi. Alternatively, the container 402 may be pressurized for a period of time, preferably about three minutes. The vapor valve 408 having the flare line 422 attached thereto may be opened to vent the steam to the flare 424 via step 206. Residual chemicals that may still be contained within the container 402 may thereby be removed. The steam may be vented through the container 402 for a desired period of time, preferably about 30 minutes, to thoroughly clean the interior of the container 402. After the desired period of time, the liquid valve 410 may be closed allowing the container 402 to depressurize via step 208. The flare line 422 may be removed via step 210 and the steam line may be moved from the liquid valve 410 to the vapor valve 408.

Pipes may be attached to the liquid valve 410 and may allow the steam flowing therethrough to be vented directly to the atmosphere. After the liquid valve 410 and vapor valve 408 have been opened, the container 402 may be steamed via step 212 for a desired period of time, preferably about 3 or 3 1/2 hours. The waste steam may be vented through a pipe attached to the liquid valve 410.

After the container 402 has been steamed for the desired period of time via step 212, then the vapor valve 408 may be closed, and the steam therein allowed to vent to the atmosphere thereby depressurizing the container 402 via step 214. The steam line (not shown) may be removed and an air line (not shown) may be attached to the vapor valve 408 via step 216. The vapor valve 408 may be opened and dry, cool air may be allowed to flow through the container 402 for a desired time period, preferably 30 minutes, via step 218 to allow the container 402 to become dry and cool.

After the desired time period is over, the vapor valve may be closed and all lines may be removed via step 220. The pressure plate (not shown) on the container 402 may be removed and the container 402 further allowed to cool via step 222. Finally, after the container 402 is cooled, the container 402 may be allowed to dry. Debris, such as residual scale and other deposits, may be removed via step 224 by fitting an individual within the container 402 with equipment to remove the debris.

The addition of heated nitrogen and steam and the subsequent venting of gases via the processes 1, 100 and/or 200 may be controlled by a control panel 430 having buttons, switches, lights, warnings, or any other controls or displays that may inform a user and allow a user to control the processes 1, 100 and/or 200 described above.

It should be noted that various changes and modifications to the presently preferred embodiments described herein will be apparent to those skilled in the art. Such changes and modifications may be made without departing from the spirit and scope of the present invention and without diminishing its attendant advantages. It is, therefore, intended that such changes and modifications be covered by the appended claims.

## CLAIMS

We claim:

1. A method of cleaning a pressurized container, the method comprising the steps of:  
providing a pressurized container containing an amount of anhydrous ammonia  
wherein the container has inlet and outlet valves;  
injecting a quantity of heated nitrogen gas into the container to form a  
nitrogen/anhydrous ammonia mixture; and  
venting the nitrogen/anhydrous ammonia mixture to the flare; and  
repeating the injection of the container with heated nitrogen gas and venting  
the mixture to a flare until the concentration of anhydrous ammonia is less than or  
equal to about 10,000 ppm.
2. The method of claim 1 further comprising the steps of:  
providing a natural gas inlet for feeding natural gas to a burn ring within the  
flare;  
feeding the nitrogen/anhydrous ammonia mixture to the burn ring.
3. The method of claim 1 further comprising the steps of:  
providing a blower for flowing air into the flare; and  
blowing air into the flare via the blower to aid in the burning of the anydrous  
ammonia.
4. The method of claim 1 further comprising the steps of:  
visually looking for leaks in the container;  
providing a housing having a cover on the container having a plurality of  
valves therein and a plurality of sideports for access to the interior of the housing;  
sampling the interior of the housing via the sideport for a quantity of  
anhydrous ammonia via a chemical detecting instrument for leaks; and  
removing the cover of the housing to inspect the interior of the housing for  
leaks.
5. The method of claim 1 further comprising the steps of:  
weighing the container; and

comparing the weight of the container to a tare weight of the container to determine a weight of the anhydrous ammonia therein.

6. The method of claim 1 further comprising the steps of:

providing a nitrogen tank having nitrogen contained therein;

attaching a nitrogen line between the nitrogen tank and a first valve of the container;

heating a portion of the nitrogen line to heat nitrogen contained within the nitrogen line; and

attaching a flare line between the container and the flare.

7. The method of claim 1 further comprising the steps of:

sampling a quantity of anhydrous ammonia in vapor form to determine a concentration of vapor within the container; and

verifying the identity of the anhydrous ammonia within the container.

8. The method of claim 1 wherein the nitrogen gas is heated to between 100°F and 300°F.

9. The method of claim 1 further comprising the steps of:

inspecting the container for leaks via a leak detection apparatus; and

stopping the cleaning of the container if a leak is found having a concentration of at least 50 ppm.

10. The method of claim 1 further comprising the steps of:

injecting the heated nitrogen into the container via a liquid valve on the container; and

venting the gas within the container to the flare via one of the valves.

11. A method of cleaning a pressurized container, the method comprising the steps of:

providing a pressurized container an amount of anhydrous ammonia wherein the container has a plurality of valves;

injecting a quantity of heated nitrogen gas into the container to form a nitrogen/anhydrous ammonia mixture;

venting the nitrogen/anhydrous ammonia mixture to a flare; and

repeating injecting the container with the heated nitrogen gas and venting the mixture of the flare until the concentration of the anhydrous ammonia is at most about 50 ppm.

12. The method of claim 11 further comprising the steps of:

inspecting the container for leaks.

13. The method of claim 11 further comprising the steps of:

inspecting the container for leaks via a leak detection apparatus; and

stopping the cleaning of the container if a leak is found having a concentration of at least about 50 ppm.

14. The method of claim 11 further comprising the steps of:

visually looking for leaks in the container;

providing a housing having a cover and an interior space wherein a plurality of valves are contained within the interior space;

providing at least one sideport in the housing for accessing the interior space of the housing;

sampling the interior of the housing via the sideport for a leak in the plurality of valves via a chemical detection device; and

removing the cover to inspect the interior space of the housing for leaks.

15. The method of claim 11 further comprising the steps of:

weighing the container; and

comparing the weight of the container to a tare weight of the container to determine a weight of the anhydrous ammonia therein.

16. The method of claim 11 further comprising the steps of:

providing a nitrogen tank having nitrogen therein;

attaching a nitrogen line between a nitrogen tank and a first valve of the container;

heating a portion of the nitrogen line to heat nitrogen contained within the nitrogen line; and

attaching a flare line between the container and a flare.

17. The method of claim 11 further comprising the steps of:

sampling a quantity of anhydrous ammonia contained in the headspace of the container to determine a concentration of the anhydrous ammonia within the headspace.

18. The method of claim 11 wherein the nitrogen gas is heated to between 100°F and  
5 300°F.

19. The method of claim 11 further comprising the steps of:

injecting the heated nitrogen into the container via a liquid valve on the container; and

venting the nitrogen/anhydrous ammonia mixture within the container to the  
10 flare via a vapor valve on the container.

20. The method of claim 11 further comprising the steps of:

injecting the container with steam after the concentration of the anhydrous ammonia therein is about 50 ppm;

removing the pressure plate on the container; and


15 entering the container and cleaning debris from the container.

## ABSTRACT

The present invention relates to a method of cleaning a container having an amount of anhydrous ammonia contained therein. The container is first inspected thoroughly for leaks. Heated nitrogen gas is then fed into the container. The heated nitrogen gas may be transported from a nitrogen storage tank to the container via at least one pipe. Liquid nitrogen may be fed into a vaporizer for vaporizing the nitrogen. The liquid nitrogen gas may then be heated via a heater, such as a steamer, to expand the nitrogen gas and ensure that no liquid nitrogen enters the container. The heated nitrogen gas may vaporize any liquid anhydrous ammonia contained therein. Further, the heated nitrogen gas may transport the anhydrous ammonia to a flare for incineration. The heated nitrogen gas may be added any number of times to reduce the concentration of the anhydrous ammonia therein to a desired level. The container may then be steam cleaned and opened to enter and thoroughly clean the inside of the container.

CHI99 3547803-1.047440.0021

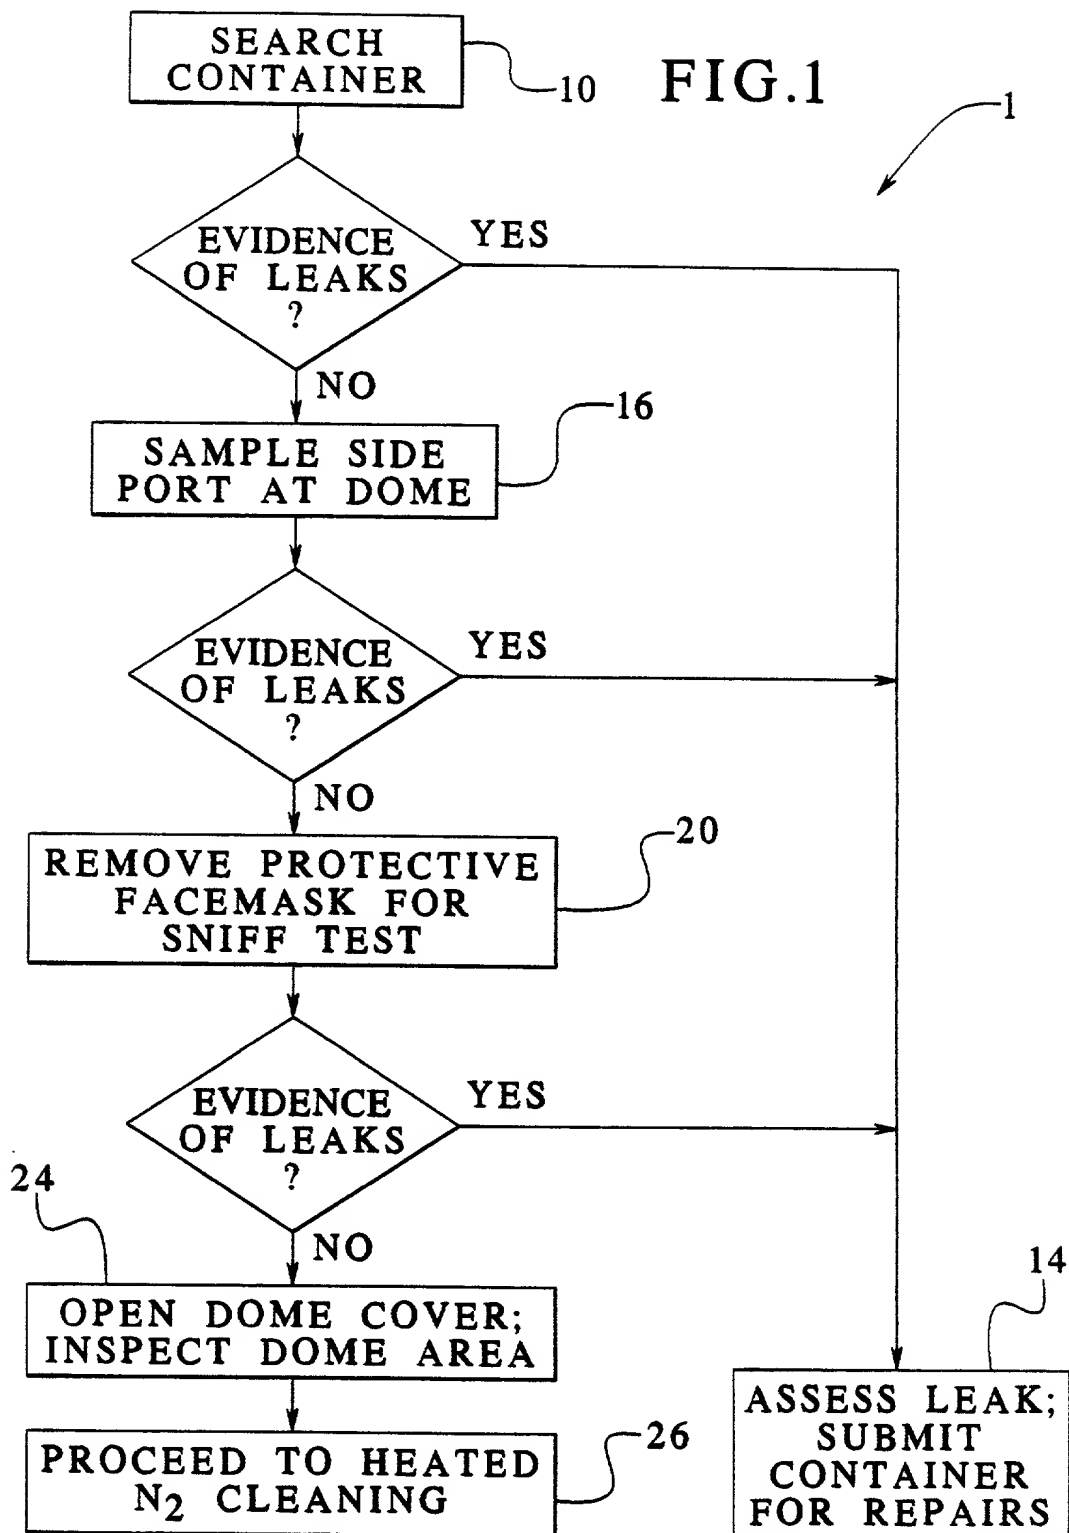

[illegible]

```

graph TD
    102[WEIGH CONTAINER] --> 104[GROUND CONTAINER]
    104 --> 106[ATTACH PRESSURE GAUGE]
    106 --> 110{IS THERE PRESSURE IN CONTAINER?}
    110 -- YES --> 112[TAKE SAMPLE FROM CONTAINER]
    110 -- NO --> 114[PRESSURIZE CONTAINER WITH HEATED N2 GAS]
    114 --> 112
    112 --> 116[INSPECT FOR LEAKS]
    116 --> 118[TEST CHEMICAL]
    118 --> 120[VENT GAS]
    120 --> 122[FILL CONTAINER WITH HEATED N2]
    122 --> 124[VENT GAS TO FLARE]
    124 --> 126[RELIEVE RESIDUAL PRESSURE]
    126 --> 128[PROCEED TO STEAM CLEAN]
    128 --> 130[END]
    124 --> 132[REPEAT AS NECESSARY]
    132 --> 120

```

FIG.3

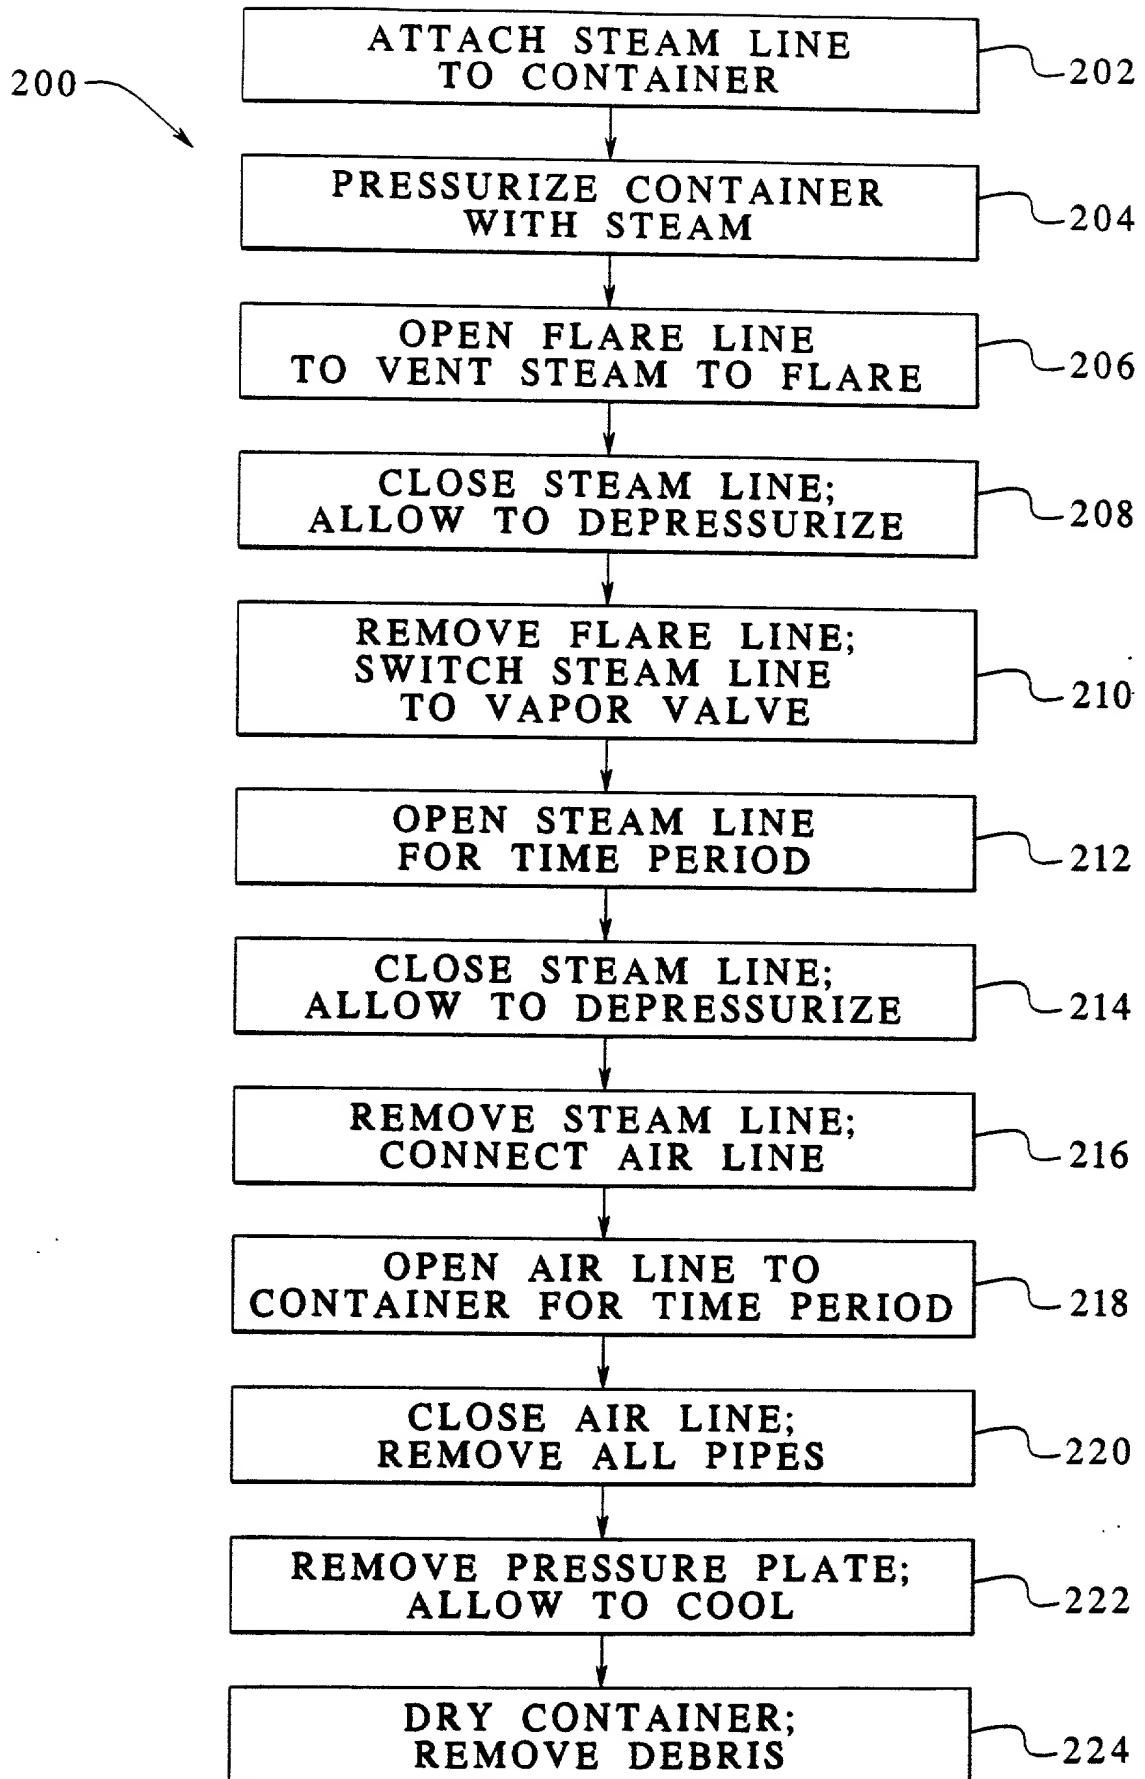


FIG. 4A



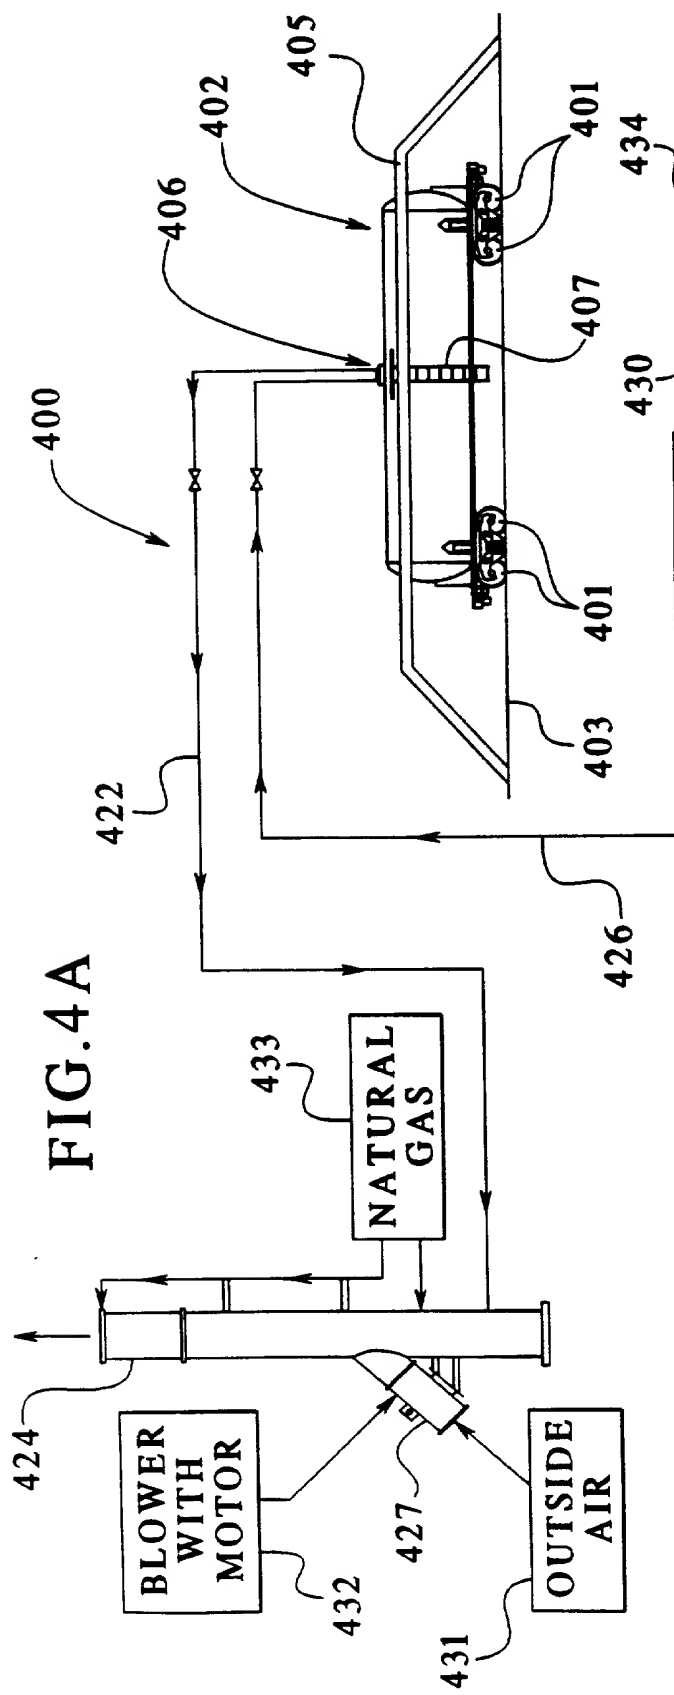


FIG. 4B

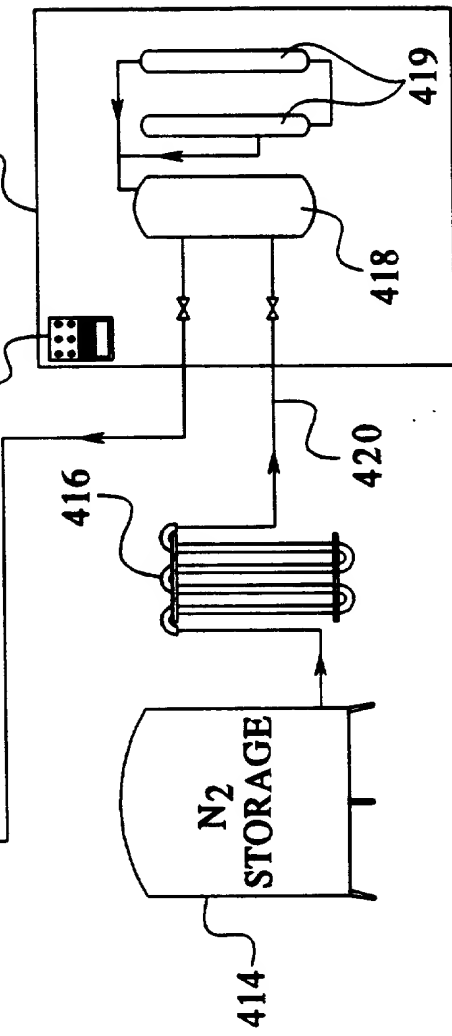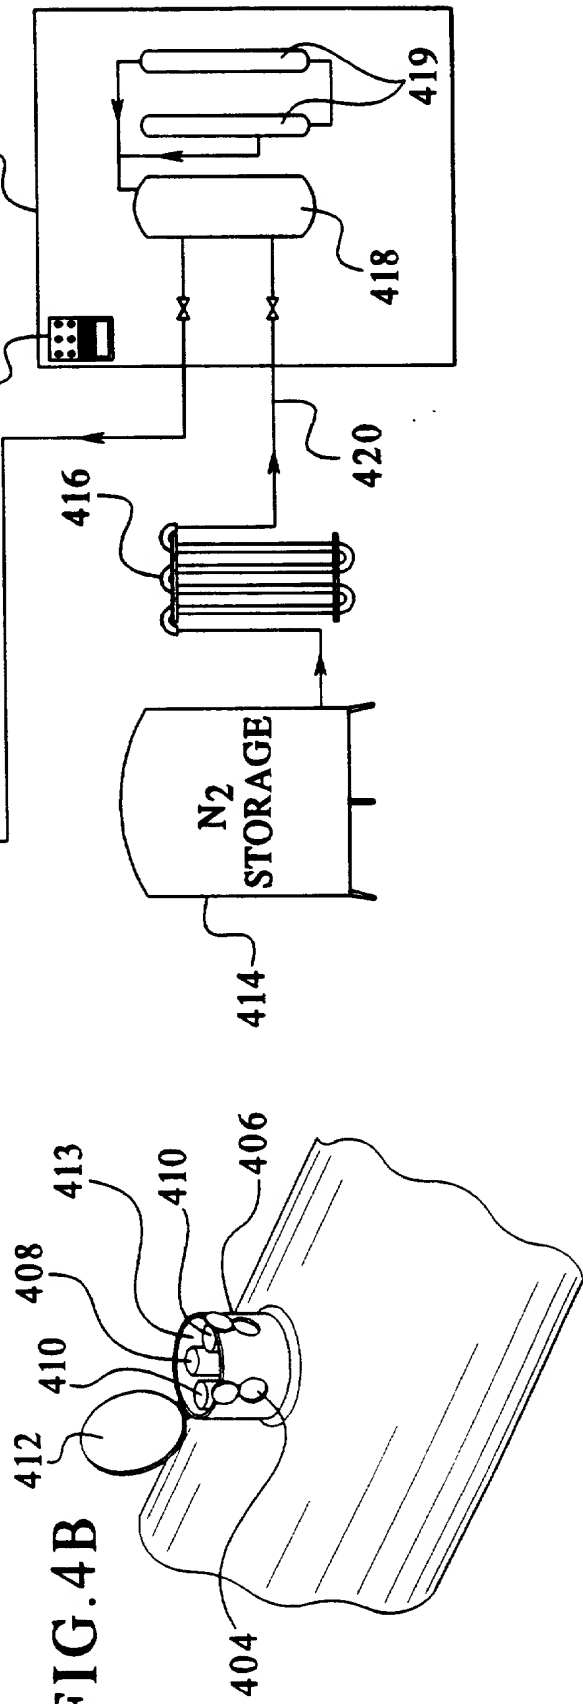

# DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)

<input checked="" type="checkbox"/> Declaration Submitted with Initial Filing <div style="text-align: center;">or</div> <input type="checkbox"/> Declaration Submitted After Initial Filing <i>(Surcharge (37 CFR 1.16(e) required)</i>	Attorney Docket No.	47440 021	
	First Named Inventor	Joseph P. Tunney	
	<b>COMPLETE IF KNOWN</b>		
	Application No.	Not Assigned	
	Filing Date	Not Assigned	
	Group / Art Unit	Not Assigned	
	Examiner Name	Not Assigned	

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **A METHOD OF CLEANING PRESSURIZED CONTAINERS CONTAINING ANHYDROUS AMMONIA**, the specification of which is filed herewith.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 USC §119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or of any PCT international application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application Nos.	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached	
				Yes	No
None			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 USC §119(e) of any United States provisional application(s) listed below:

Application Number(s)	Filing Date (MM/DD/YYYY)	
None		<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

I hereby claim the benefit under 35 USC §120 of any United States application(s), or 365(c) of any PCT international application(s) designating the United States of America listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 USC §112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)
None		

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

Applicants hereby appoint Joseph H. Paquin, Jr. (31,647), Margaret M. Duncan (30,879), John Bisbikis (37,095), Tracy Thomas (38,633), Stephen Scherrer (45,080) and Joy Ann G. Serauskas (27,952) of McDERMOTT, WILL & EMERY, which has associated with it and with the power to appoint associate attorneys, as its attorneys, with full power of revocation, to prosecute this application, to transact all business in the U.S. Patent and Trademark Office and in the courts in connection therewith and to receive the Certificate of Registration

Please direct all correspondence and telephone inquiries to:

Stephen T. Scherrer  
McDERMOTT, WILL & EMERY  
227 W. Monroe Street  
Chicago, IL 60606-5096  
Telephone: 312-372-2000  
Fax: 312-984-7700

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of first inventor:

Joseph P. Tunney

Inventor's Signature:

Joseph P. Tunney  
9/29/00

Date:

Residence:

1207A Central Street  
Evanston, Illinois 60201

Citizenship:

US

Post Office Address:

1207A Central Street, Evanston, Illinois 60201

Name of first inventor:

Paul Buchan

Inventor's Signature:

Executed Separately

Date:

Residence:

14 Kowalchuk Crescent  
Regina Saskatchewan  
Canada S4R 6W8

Citizenship:

Canadian

Post Office Address:

14 Kowalchuk Crescent, Regina Saskatchewan, Canada S4R 6W8

# DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)

<input checked="" type="checkbox"/> Declaration Submitted with Initial Filing or <input type="checkbox"/> Declaration Submitted After Initial Filing (Surcharge (37 CFR 1.16(e) required)	Attorney Docket No.	47440 021
	First Named Inventor	Joseph P. Tunney
	COMPLETE IF KNOWN	
	Application No.	Not Assigned
	Filing Date	Not Assigned
	Group / Art Unit	Not Assigned
	Examiner Name	Not Assigned

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **A METHOD OF CLEANING PRESSURIZED CONTAINERS CONTAINING ANHYDROUS AMMONIA**, the specification of which is filed herewith.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 USC §119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or of any PCT international application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application Nos.	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached	
				Yes	No
None			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 USC §119(e) of any United States provisional application(s) listed below:

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.
None		

I hereby claim the benefit under 35 USC §120 of any United States application(s), or 365(c) of any PCT international application(s) designating the United States of America listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 USC §112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)
None		

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.


Applicants hereby appoint Joseph H. Paquin, Jr. (31,647), Margaret M. Duncan (30,879), John Bisbikis (37,095), Tracy Thomas (38,633), Stephen Scherrer (45,080) and Joy Ann G. Serauskas (27,952).of McDERMOTT, WILL & EMERY, which has associated with it and with the power to appoint associate attorneys, as its attorneys, with full power of revocation, to prosecute this application, to transact all business in the U.S. Patent and Trademark Office and in the courts in connection therewith and to receive the Certificate of Registration

Please direct all correspondence and telephone inquiries to:

Stephen T. Scherrer  
McDERMOTT, WILL & EMERY  
227 W. Monroe Street  
Chicago, IL 60606-5096  
Telephone: 312-372-2000  
Fax: 312-984-7700

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of first inventor: Joseph P. Tunney  
Inventor's Signature: Executed Separately  
Date: \_\_\_\_\_  
Residence: 1207A Central Street  
Evanston, Illinois 60201  
Citizenship: US  
Post Office Address: 1207A Central Street, Evanston, Illinois 60201

Name of first inventor: Paul Buchan  
Inventor's Signature:   
Date: 10/11/00  
Residence: 14 Kowalchuk Crescent  
Regina Saskatchewan  
Canada S4R 6W8  
Citizenship: Canadian  
Post Office Address: 14 Kowalchuk Crescent, Regina Saskatchewan, Canada S4R 68W